



SHENZHEN GUO SHUN WEI ELECTRONICS CO.,LTD

GS7530 GS7533 GS7536 GS7544 GS7550 产品规格书



# 100 mA, high input voltage LDO Linear Regulators GS75XX Series


## General Description

GS75XX series are low-dropout linear voltage regulators with a built-in voltage reference module, error correction module and phase compensation module. GS75XX series are based on the CMOS process and allow high voltage input with low quiescent current. This series has the function of internal feedback resistor setting from 3.0V to 5.0V. The output accuracy is  $\pm 2\%$ .

## Features

- High output accuracy:  $\pm 2\%$
- Input voltage: up to 18 V
- Output voltage: 3.0 V ~ 5.0V
- Ultra-low quiescent current (Typ. = 3  $\mu$  A)
- Output Current:  $I_{out} = 100mA$   
(When  $V_{in} = 7V$  and  $V_{out} = 5V$ )
- Importation good stability: Typ. 0.05% / V
- Low temperature coefficient
- Ceramic capacitor can be used
- Package: SOT89-3、TO92


## Selection Guide

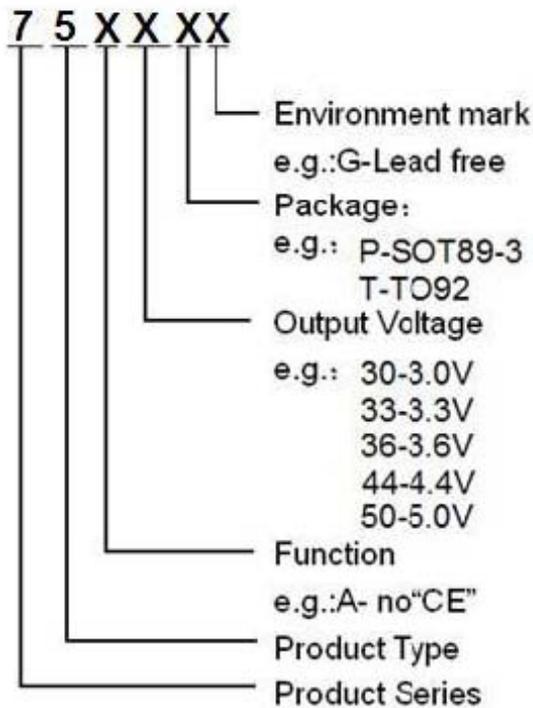


## Typical Application

- Electronic weighbridge
- SCM
- Phones, cordless phones
- Security Products
- Water meters, power meters

## Typical Application Circuit

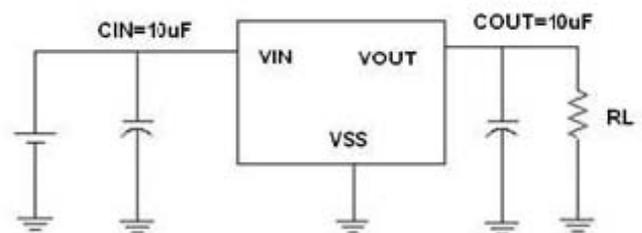

### Pin Configuration

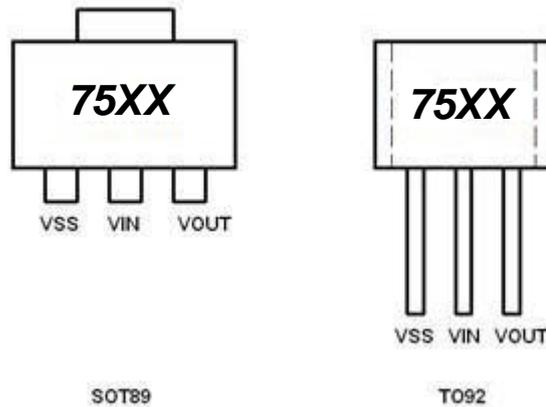

### Pin Assignment


GS75XX

Pin Number		Pin Name	Functions
SOT89-3	T092		
1	1	V <sub>SS</sub>	Ground
2	2	V <sub>IN</sub>	Power Input
3	3	V <sub>OUT</sub>	Output

### Absolute Maximum Ratings

Parameter	Symbol	Ratings	Units
Input Voltage	V <sub>IN</sub>	18	V
Output Current	I <sub>OUT</sub>	250	mA
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3	V
Power Dissipation	SOT89-3	P <sub>D</sub>	500
	T092		500
Operating Temperature Range	T <sub>OPR</sub>	-25~+85	°C
Storage Temperature Range	T <sub>STG</sub>	-40~+125	°C
Lead Temperature		260°C, 10sec	

### Block Diagram

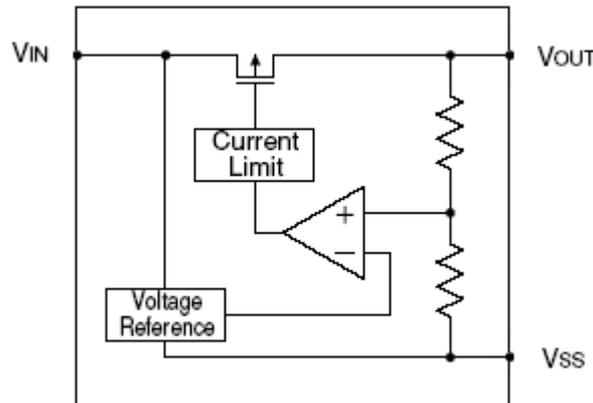

### Electrical Characteristics

GS75XX

( $V_{IN} = V_{OUT} + 2.0V$ ,  $C_{IN} = C_L = 10\mu F$ ,  $T_a = 25^\circ C$ , unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT(E)}$ (Note 2)	$I_{OUT} = 40mA$ , $V_{IN} = V_{OUT} + 2V$	X 0.98	$V_{OUT(T)}$ (Note 1)	X 1.02	V
Input Voltage	$V_{IN}$				18	V
Maximum Output Current	$I_{OUT\_max}$	$V_{IN} = V_{OUT} + 2V$	150			mA
Load Regulation	$\Delta V_{OUT}$	$V_{IN} = V_{OUT} + 2V$ , $1mA \leq I_{OUT} \leq 100mA$		10		mV
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT} = 50mA$		250		mV
	$V_{dif2}$	$I_{OUT} = 100mA$		500		mV
	$V_{dif3}$	$I_{OUT} = 200mA$		1000		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 2V$		3		$\mu A$
Line Regulations	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 2V \leq V_{IN} \leq 18V$		0.05		%/V

Note :


- $V_{OUT(T)}$  : Specified Output Voltage
- $V_{OUT(E)}$  : Effective Output Voltage ( ie. The output voltage when " $V_{OUT(T)} + 2.0V$ " is provided at the Vin pin while maintaining a certain  $I_{OUT}$  value.)
- $V_{DIF}$ :  $V_{IN1} - V_{OUT(E)}$   
 $V_{IN1}$  : The input voltage when  $V_{OUT(E)}$  appears as input voltage is gradually decreased.  
 $V_{OUT(E)}$  = A voltage equal to 98% of the output voltage whenever an amply stabilized  $I_{OUT}$  and  $\{V_{OUT(T)} + 2.0V\}$  is input.



Type Characteristics


(1) Output Current VS. Output Voltage ( Ta = 25 °C )

GS7550

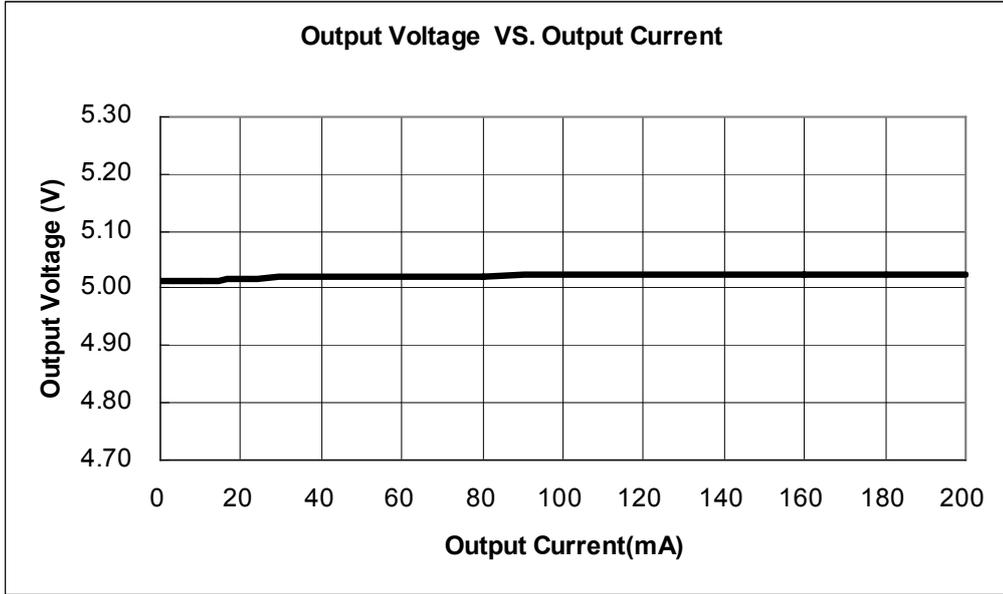

(2) Input Voltage VS. Output Voltage ( Ta = 25 °C )


GS7550

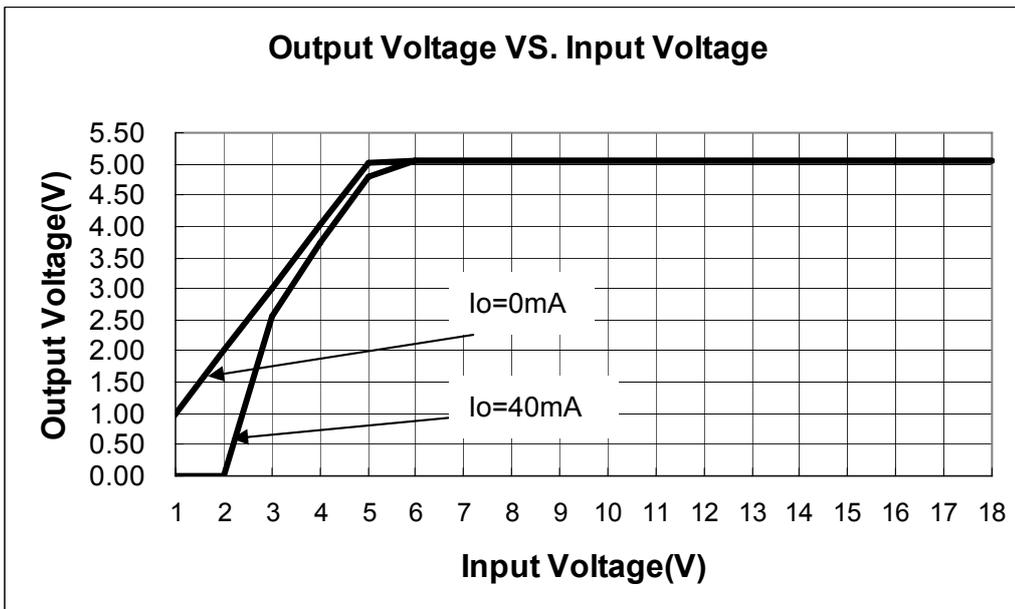




(3) Output Current VS. Dropout Voltage (  $T_a = 25\text{ }^\circ\text{C}$  )

GS7550

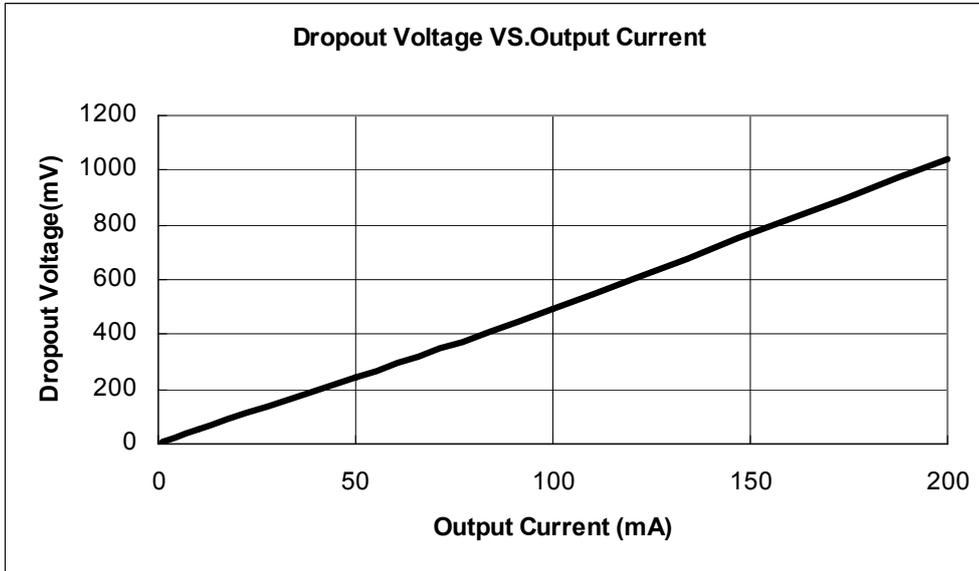


(4) Input Voltage VS. Supply Current (  $T_a = 25\text{ }^\circ\text{C}$  )

GS7550

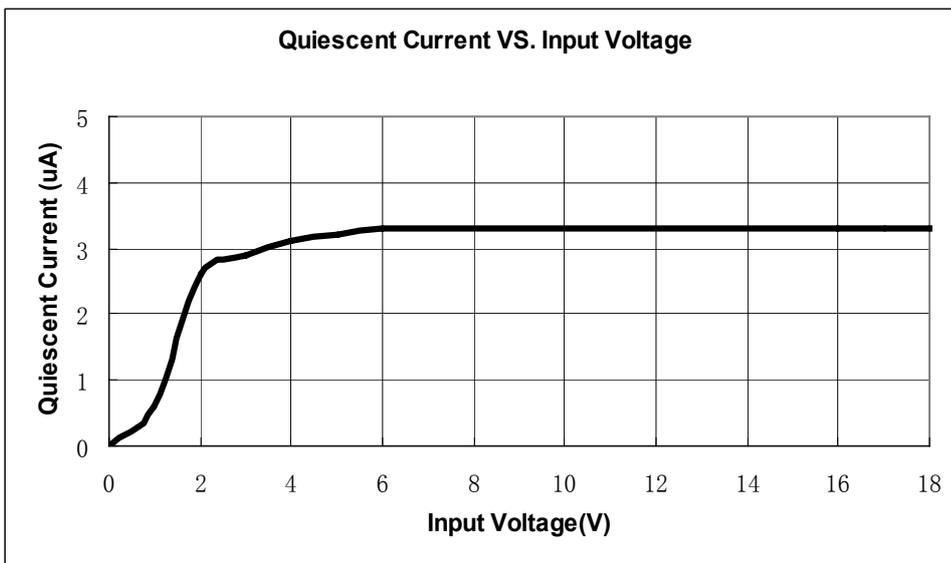

**Packaging Information**

- SOT89-3

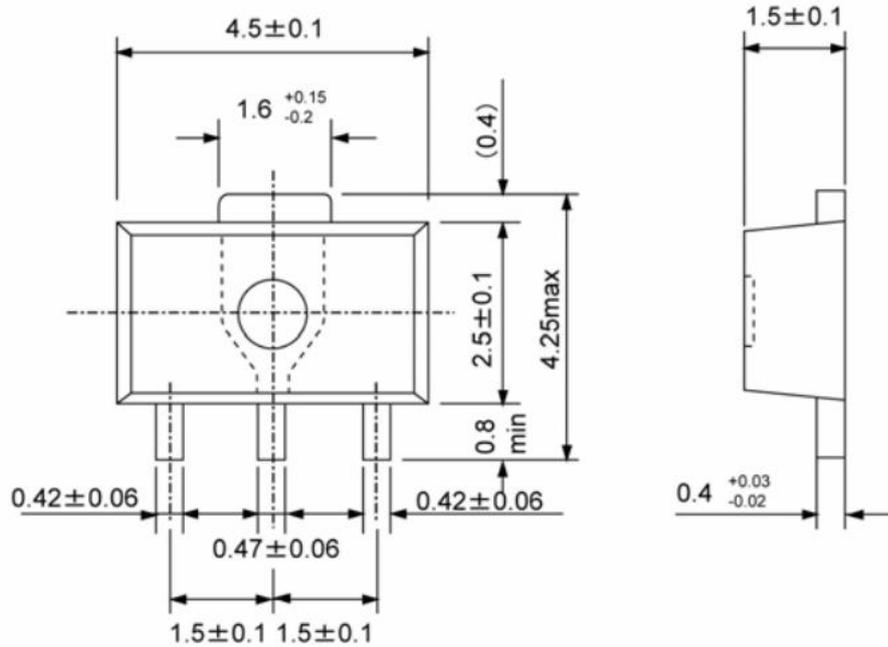

- TO-92

